

DP-10/15 SERIES

DP-10 Aluminum (ADC-12)

Dimensions:

186 mm W x 241 mm H

Net weight: 3,5 kg

Maximum Capacity: 20 l/min



DP-10 Polypropylene (PPG)

Dimensions:

195 mm W x 196 mm H

Net weight: 3,0 kg

Maximum Capacity: 17 l/min



DP-10 Stainless Steel (SCS14)

Dimensions:

186 mm W x 237 mm H

Net weight: 5,2 kg

Maximum Capacity: 20 l/min



DP-15 Polypropylene (PPG)

Dimensions:

246 mm W x 297 mm H

Net weight: 3,5 kg


Maximum Capacity: 27 l/min



DP-10/15 SERIES

SPECIFICATIONS	DP-10	DP-15
Body Material	Aluminum, Stainless Steel & Polypropylene	Polypropylene
Maximum Flow Rate	17-20 l/min	27 l/min
Fluid Port Dimensions	3/8" Female Rc (10 mm)	1/2" Female Rc (15 mm)
Air Supply Pressure	2 - 7 Bar	2 - 7 Bar
Discharge Volume Per Cycle	50 mL	55 mL
Maximum Air Consumption	300 l/min (ANR)	300 l/min (ANR)
Maximum Size Solid	1,0 mm Ball Valve	1,0 mm Ball Valve / 0,0 mm Flat Valve
Air Inlet	1/4" 6 mm Female Rc	1/4" 6 mm Female Rc
Diaphragm options	CR, NBR, TPO, PTFE, FKM, TPEE, EPDM, TU (PTFE/EPDM)	CR, NBR, TPO, PTFE, TPEE, EPDM

DP-10 Series Performance Curve

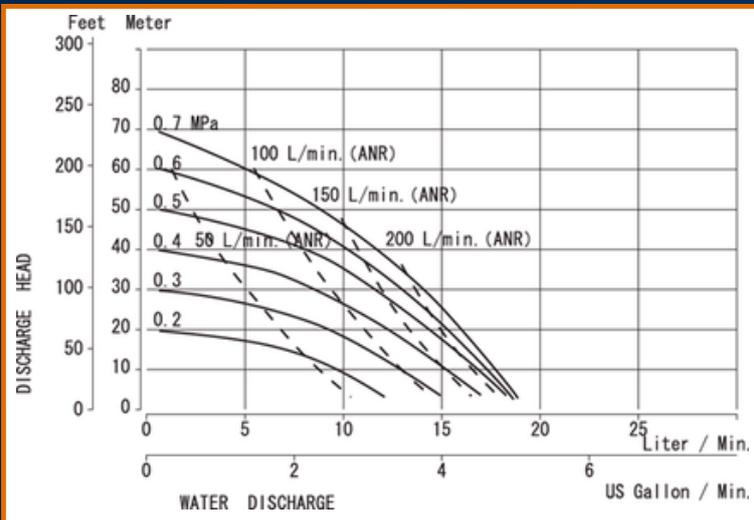

DP-15 Series Performance Curve

