



NDP-15 SERIES

NDP-15 Polypropylene (PPG)

Dimensions:

220 mm W x 297 mm H

Net weight: 3,5 kg

Maximum Capacity: 45 l/min




NDP-15 Aluminum (ADC-12)

Dimensions:

220 mm W x 269 mm H

Net weight: 4,1 kg

Maximum Capacity: 50 l/min

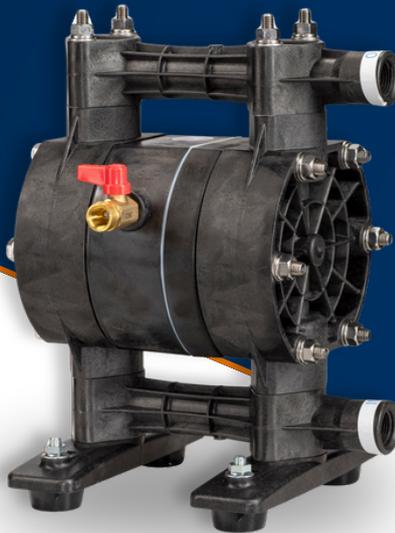

NDP-15 Conductive Kynar® (PVDF)

Dimensions:

220 mm W x 297 mm H

Net weight: 4,3 kg

Maximum Capacity: 45 l/min



NDP-15 Stainless Steel (SCS14)

Dimensions:

211 mm W x 247 mm H

Net weight: 6,3 kg

Maximum Capacity: 50 l/min






NDP-15 SERIES

SPECIFICATIONS	NDP-15 Aluminum	NDP-15 Stainless Steel	NDP-15 Polypropylene	NDP-15 Conductive Kynar®
Maximum Flow Rate	50 L/min	50 L/min	45 L/min	45 L/min
Port Size	1/2" Female Rc (15 mm)			
Air Supply Pressure	2 - 7 Bar			
Discharge Volume Per Cycle	70 mL			
Maximum Air Consumption	450 L/min	450 L/min	350 L/min	350 L/min
Maximum Size Solid	1,0 mm Ball Valve	1,0 mm Ball Valve	1,0 mm Ball Valve Flat Valve 0,0 mm	Flat Valve 0,0 mm
Air Inlet	1/4" 6 mm Female Rc			
Diaphragm options	EPDM, TPEE, NBR, TPO, FKM, CR, PTFE, TU (PTFE/EPDM)	EPDM, TPEE, NBR, CR, PTFE, FKM, TPO, TU (PTFE/EPDM)	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU (PTFE/EPDM)	EPDM, TPEE, PTFE, TU (PTFE/EPDM), TPO, FKM

Metal Pump Performance Curve

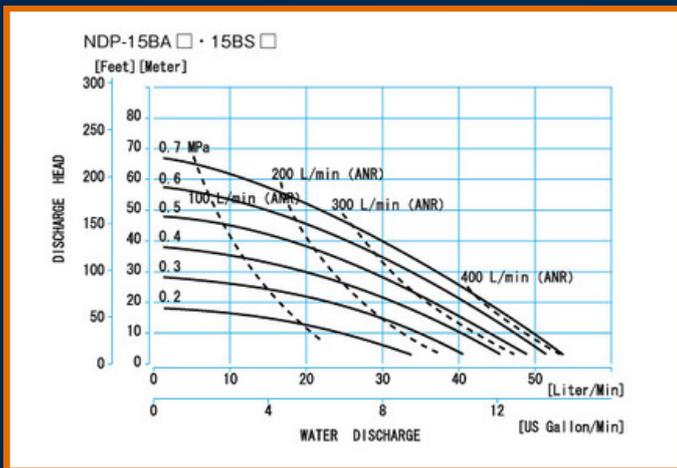

Plastic Pump Performance Curve

