

# NDP-(P)20 SERIES

## NDP-20 Aluminum




### Dimensions:

249 mm W x 317 mm H

Net weight: 9,0 kg

Maximum Capacity: 110 l/min

\*PTFE diaphragm 100 l/min

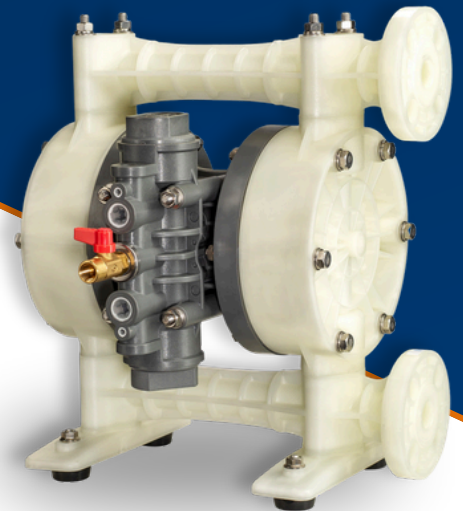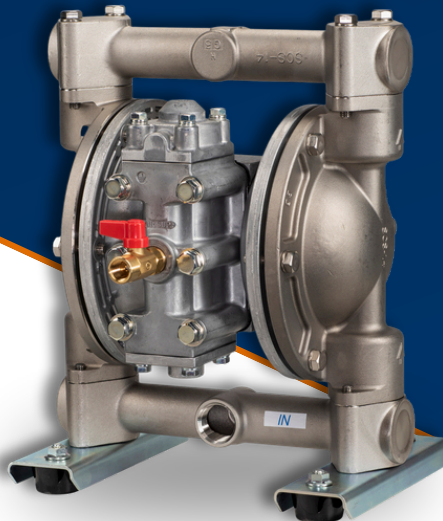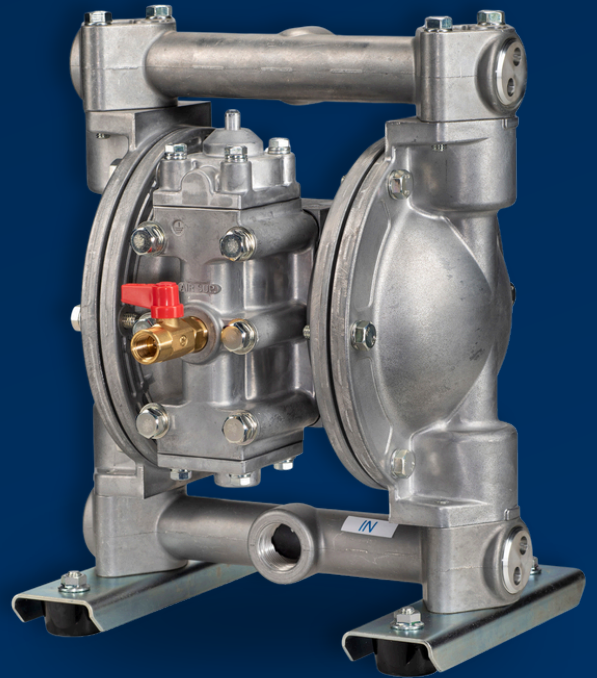

## NDP-P20 Polypropylene-Rc

### Dimensions:

317 mm W x 368 mm H

Net weight: 7,0 kg

Maximum Capacity: 110 l/min

\*PTFE diaphragm 100 l/min

## NDP-20 Stainless Steel (SCS14)

### Dimensions:

245 mm W x 315 mm H

Net weight: 14,0 kg

Maximum Capacity: 110 l/min

\*PTFE diaphragm 100 l/min

## NDP-P20 Polypropylene-DN Flange

### Dimensions:

316 mm W x 374 mm H

Net weight: 7,0 kg

Maximum Capacity: 110 l/min

\*PTFE diaphragm 100 l/min



# NDP-(P)20 SERIES


SPECIFICATIONS	NDP-20 Aluminum	NDP-P20 Polypropylene-Rc	NDP-20 Stainless Steel	NDP-P20 Polypropylene-DN Flange
Maximum Flow Rate	110 L/min			
Port Size	3/4" 20 mm Female Rc			
Air Supply Pressure	2 - 7 Bar			
Discharge Volume Per Cycle	Rubber diaphragm: 350 mL / PTFE diaphragm: 240 mL			
Maximum Air Consumption	PTFE diaphragm: 1400 L/min / Other diaphragm: 1200 L/min			
Maximum Size Solid	2,0 mm or less (Ball Valve)			
Air Inlet	1/4" 6 mm Female Rc			
*Air Motor	Aluminum motor	PPG Motor	Aluminum motor	PPG Motor
Diaphragm options	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU (PTFE/EPDM)	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU (PTFE/EPDM)	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU (PTFE/EPDM)	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU (PTFE/EPDM)

\*Metal pumps standard with aluminum motor. Options for aluminum motor: Teflon®-coated protection  
Plastic pumps standard with PPG motor. PPG motor also optional for metal pumps.


## Metal Pump Performance Curve

## Plastic Pump Performance Curve


FOR RUBBER DIAPHRAGM

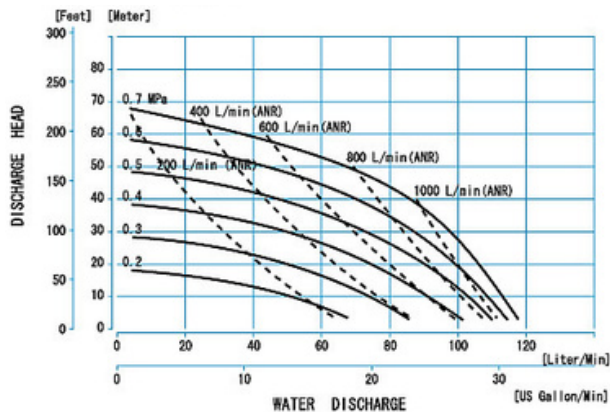

FOR RUBBER DIAPHRAGM

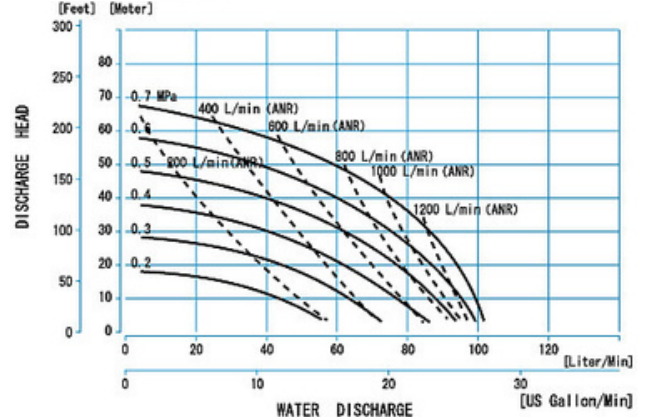

FOR PTFE DIAPHRAGM

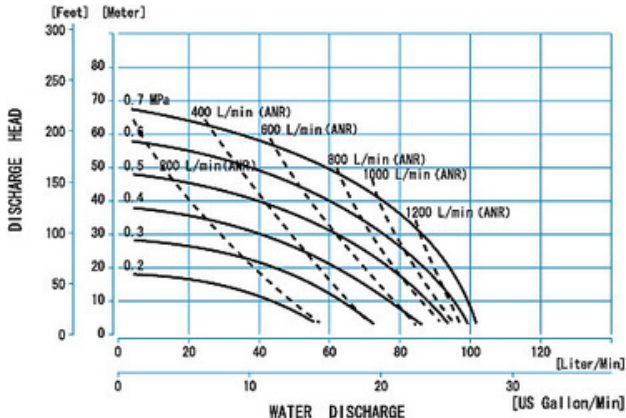

FOR PTFE DIAPHRAGM

