NDP-40 SERIES

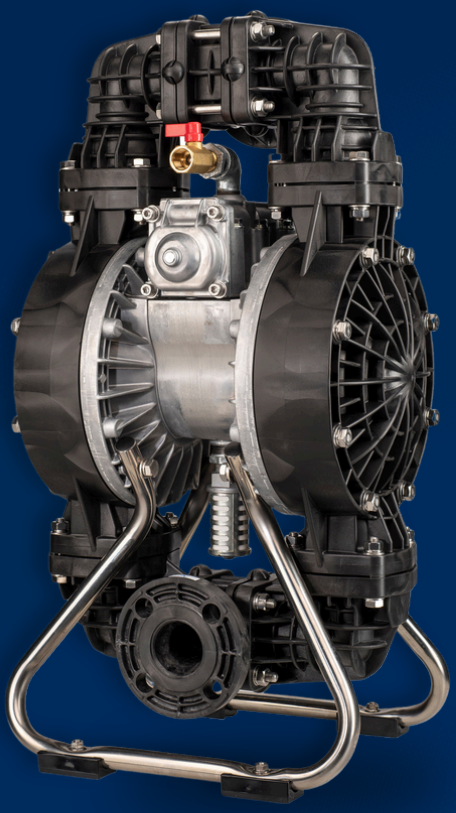

NDP-40 Conductive Kynar®

Dimensions:
398 mm W x 759 mm H
Net weight: 32,2 kg
Maximum Capacity: 350 l/min
*PTFE diaphragm 320 l/min

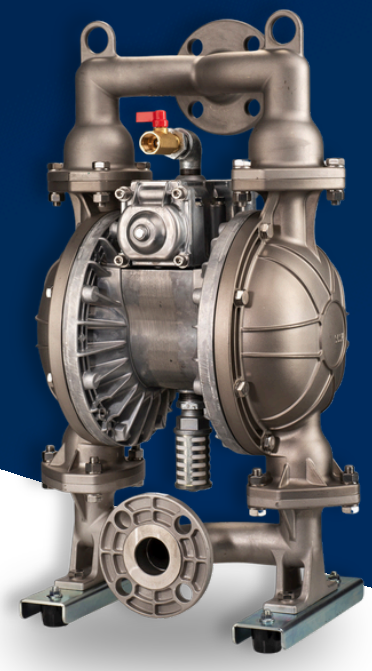

NDP-40 Aluminum

Dimensions:
412 mm W x 710 mm H
Net weight: 27,0 kg
Maximum Capacity: 350 l/min
*PTFE diaphragm 320 l/min

NDP-40 Stainless Steel

Dimensions:
411 mm W x 705 mm H
Net weight: 42,8 kg
Maximum Capacity: 350 l/min
*PTFE diaphragm 320 l/min

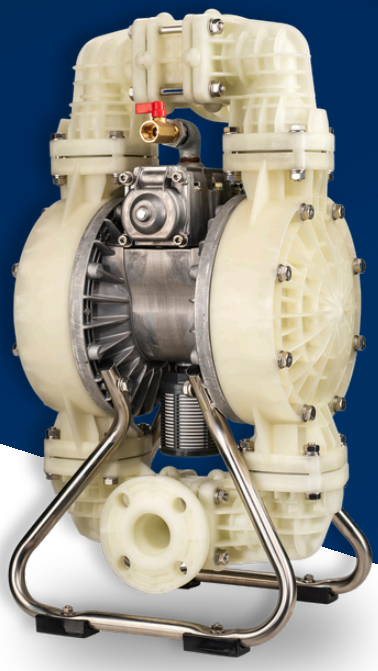

NDP-40 Polypropylene

Dimensions:
402 mm W x 752 mm H
Net weight: 27,0 kg
Maximum Capacity: 350 l/min
*PTFE diaphragm 320 l/min

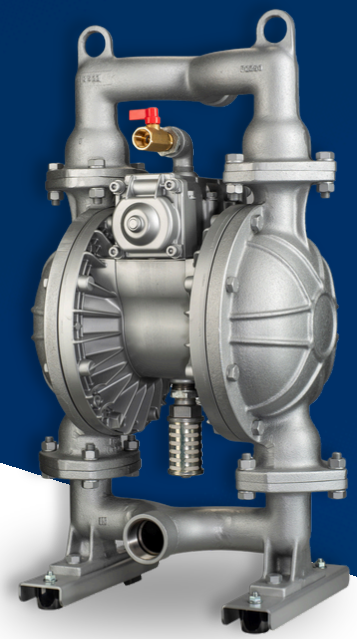

NDP-40 Cast Iron

Dimensions:
411 mm W x 704 mm H
Net weight: 47,2 kg
Maximum Capacity: 350 l/min
*PTFE diaphragm 320 l/min

yamada Europe B.V.

sales@yamada.nl +31 (0)74-242 2032 www.yamada-europe.com

NDP-40 SERIES

SPECIFICATIONS	NDP-40 Kynar	NDP-40 Polypropylene	NDP-40 Aluminum	NDP-40 Stainless Steel	NDP-40 Cast Iron
Maximum Flow Rate	350 l/min				
Port Size	1-1/2" (40 mm)				
Air Supply Pressure	2,0 – 7,0 Bar				
Discharge Volume Per Cycle	Rubber diaphragm: 2400 mL | PTFE diaphragm: 1400 mL | TU diaphragm: 1400 mL				
Maximum Air Consumption	PTFE diaphragm: 4900 L/min Other diaphragm: 4900 L/min (ANR)		PTFE diaphragm: 5100 L/min Other diaphragm: 5100 L/min		
Maximum Size Solid	7,0 mm or less				
Air Inlet	1/2" 15 mm Female Rc				
*Air Motor	Standard: Aluminum (Optional: Teflon®-coated)				
Diaphragm options	EPDM, PTFE, TPO, FKM, TU	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM, TU	EPDM, TPEE, NBR, CR, PTFE, TPO, FKM

*Ansi 150 flange available on polypropylene, aluminum, stainless steel and kynar pumps.

Metal Pump Performance Curve

FOR RUBBER DIAPHRAGM

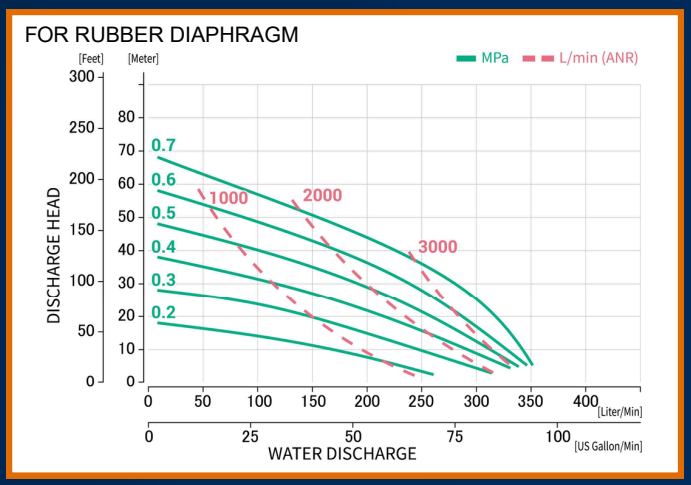

FOR PTFE DIAPHRAGM

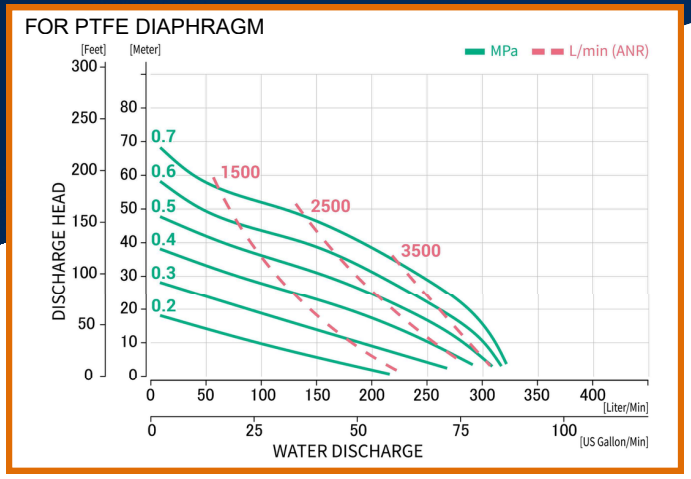

Plastic Pump Performance Curve

FOR RUBBER DIAPHRAGM

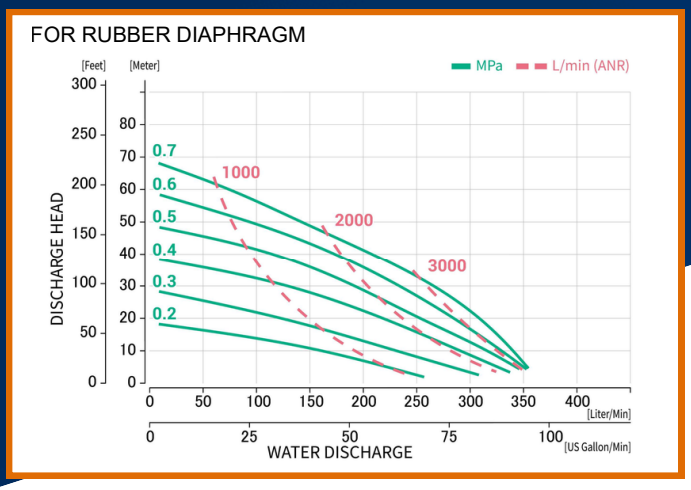

FOR PTFE DIAPHRAGM

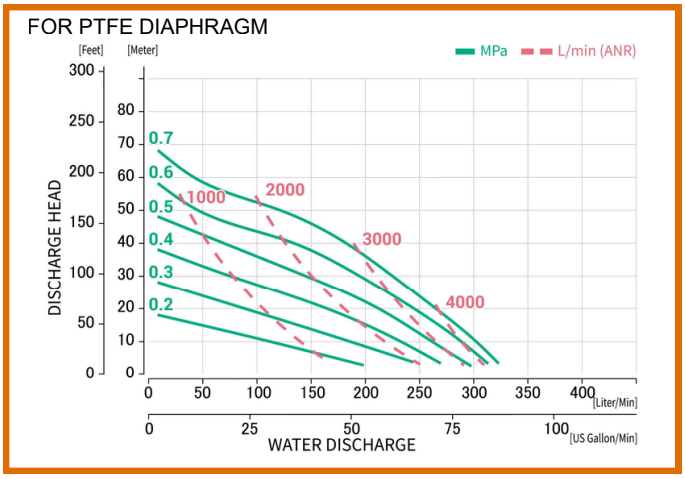

yamada Europe B.V.

sales@yamada.nl +31 (0)74-242 2032 www.yamada-europe.com